


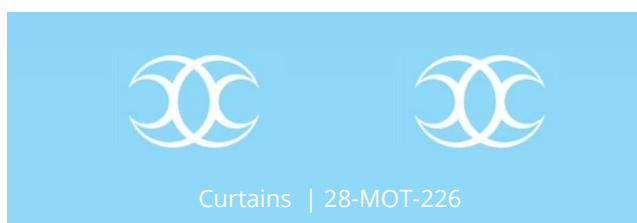
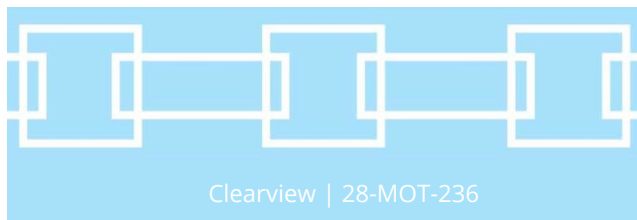
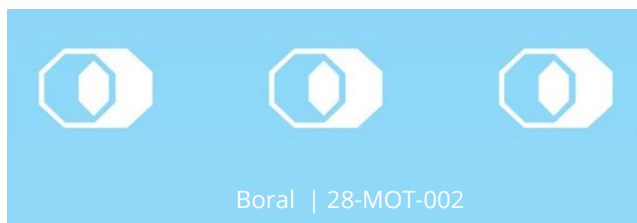
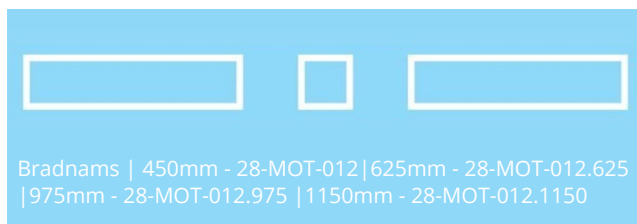


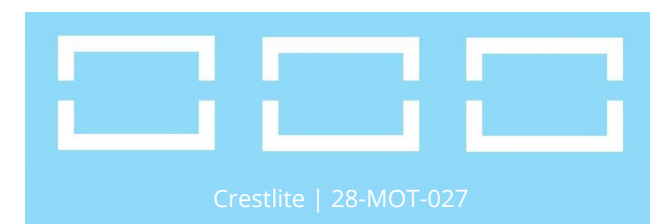

Safety Visual Adhesive Motif







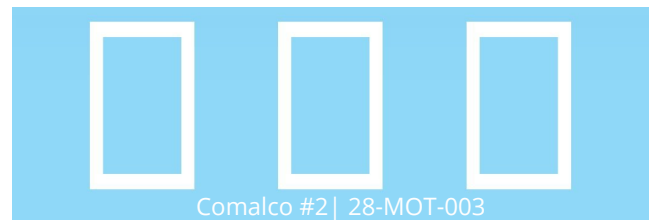


- Designed and manufactured by NFK in Australia
- Easy to apply
- Die-cut vinyl decals, no background included
- Suitable for outdoor use
- Available in various designs
- Contact us to make your own tailored design

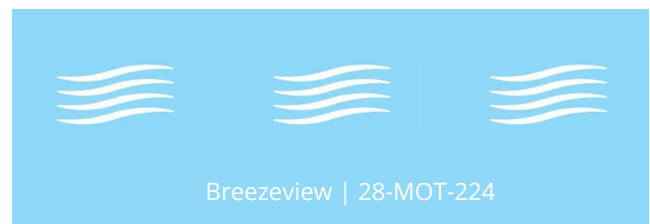








Glazing Accessories | Safety Visual Adhesive Motif

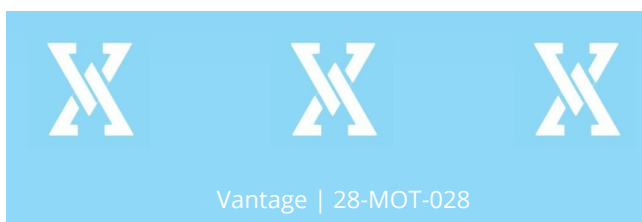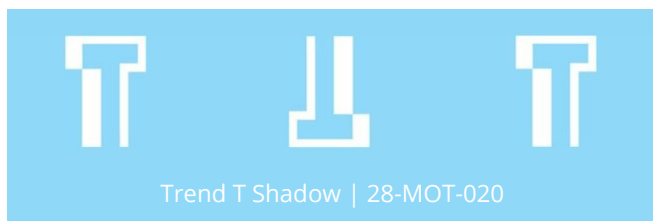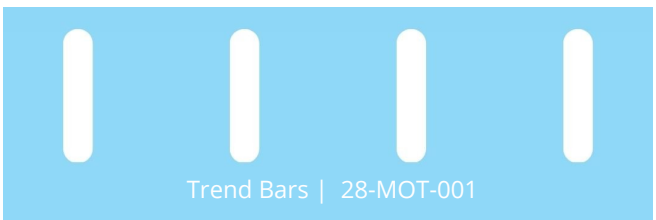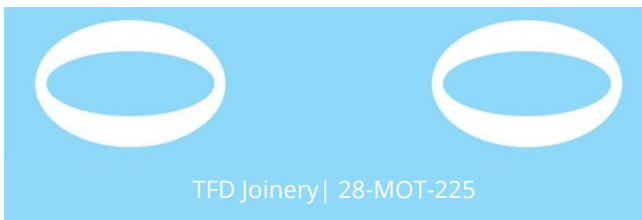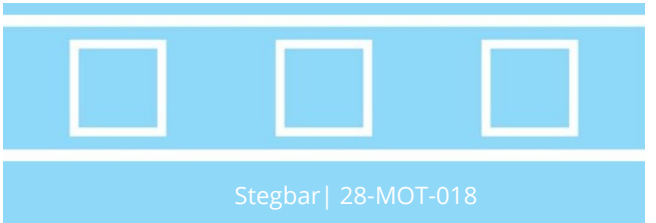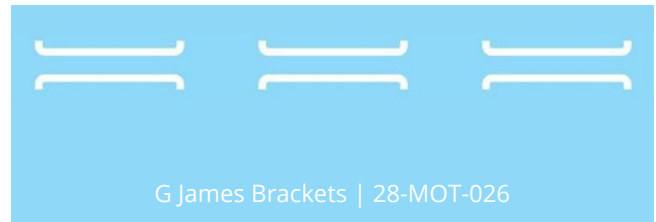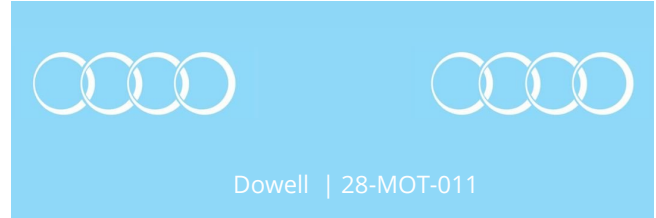




Glazing Accessories | Safety Visual Adhesive Motif

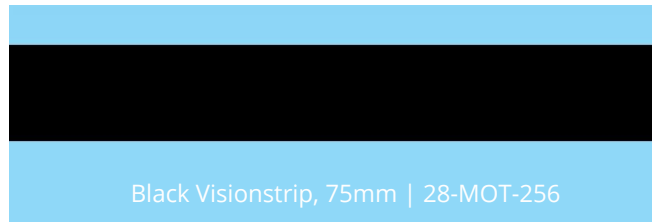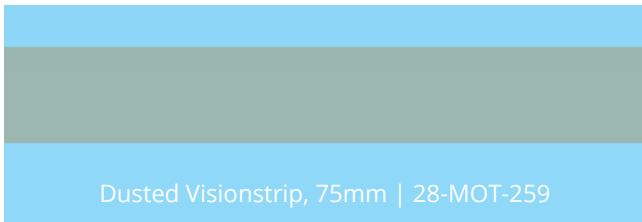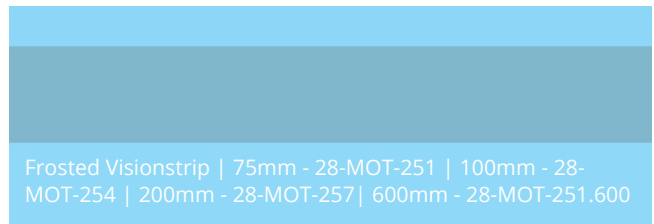



DIRECTIONS FOR APPLYING

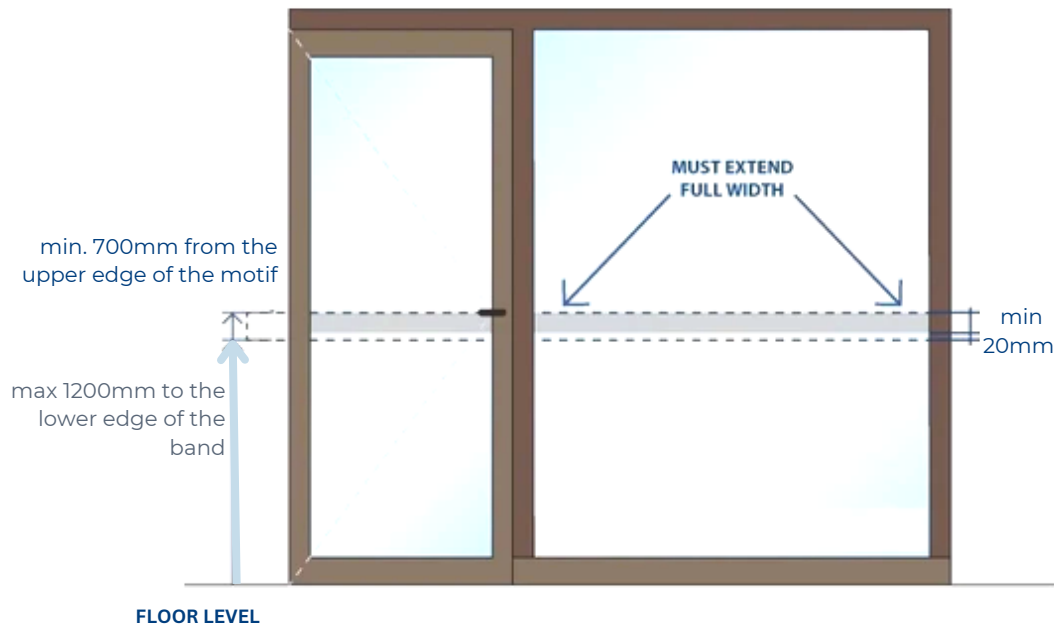

In accordance with the Australian standards AS1288, if the presence of glass in the door or side panel is not made apparent by stiles, rails, transoms, colonial bars, other components of the glazing system, or other decorative treatment, such as being opaque or patterned, the glass shall be marked to make it visible.

Where the NCC requires access for people with disabilities, glazing in buildings shall be marked in accordance with AS 1428.1.

Panels other than doors and side panels

If a glass panel can be mistaken for a doorway or opening the glass shall be marked to make it visible.

Visual glazing strips/motifs provide an easy solution to help alert people and prevent them from walking into, or through, any glazed doors or walls. The strips/motifs shall be readily apparent, so make sure that it contrasts with the background.

DIRECTIONS FOR APPLYING

Visual glazing strips/motifs must be installed as follows:

1. Clean the glass thoroughly with cleaning products before commencing installation.
2. Measure the glass panel width (edge to edge) and cut the visual glazing strip to size.
3. Measure 1000mm high or so from the ground and mark the glass panel on each edge with a non-permanent marker or use a small piece of masking tape.
4. Thoroughly spray the area including above and below where the visual glazing strip is to be installed using a spray bottle with soapy water (dishwashing liquid is highly recommended).
5. Remove the backing seal from the visual glazing strip and apply on to the glass. Adjust if required before the soapy water dries up.
6. Use a rubber window squeegee/spatula to remove any excess soapy water whilst holding the visual glazing strip/motif in the right position. Wipe any excess soapy water from the glass.
7. Peel off the top paper carefully.