

Glass Lifting & Handling Equipment | 35-VDSKZL212V-450





- Designed, engineered and manufactured in Germany
- Meets the most stringent international safety standards
- Adjustable lifting point
- Dual circuit vacuum system
- 6 Suction units
- Two extension arms
- Audio-visual low vacuum alert


Technical characteristics	
Number of suction cups	150K (diameter: 330mm) - 6
Max Lift Capacity	300 kg with 4 suction cups, without extensions450 kg with 6 suction cups, with extensions
Total Rig/Lifter Weight	approx. 55 kg
Turn	360° manual, lockable every 45°
Sway	90° manual, stepless, with a lowering cylinder
Power supply	12 V battery mains-independent with integrated charger
Features	 The voltage indicator shows the battery charge level The vacuum display shows the current vacuum level Acoustic warning signal when vacuum is undershot
Service	suction/ release valves
Optionally	Cable or radio remote control for suction, release with quick release function



DRAWINGS

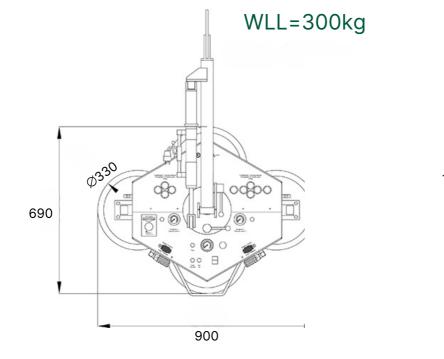



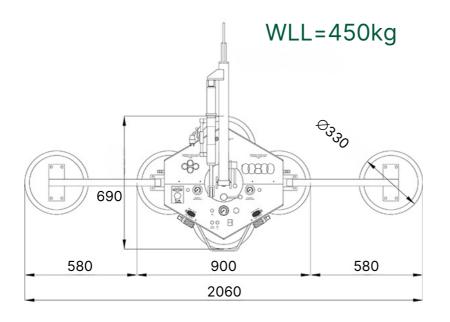

NFK Glazing & Industrial Supplies 28 Devlan Street, Mansfield, QLD 4122

- 07 3343 3377
- Sales@nfk.com.au
- 42 Tacoma Circuit, Canning Vale, WA 6155
 08 9455 3866
 wasales@nfk.com.au

www.nfk.com.au