Glass Lifting & Handling Equipment | DSKZ2-12V

Kappel Vacuum Lifter DSKZ2-12V







- Designed, engineered and manufactured in Germany
- Hydraulic tilt assist
- Dual vacuum system
- Quick-release pads and vacuum lines allow for easy configuration of cups to suit any lifting requirements
- An adjustable lifting eye allows the glass to hang as vertical as possible
- The second lifting eye directly on the frame assists in lifting under overhangs
- The narrow 190mm deep frame is ideal for working between structure and scaffold
- A flexible design allows all pads to be removed and reconfigured as required for odd-shaped/narrow glass, attaching unique lifting frames etc.
- The dual vacuum gauges display the current vacuum pressure for both circuits
- Optical and audible warning signals are standard, as is a visible volt meter
- Supplied on a lightweight trolley

Technical characteristics	
Suction pad/cups:	8 pieces, type 150K
Extensions:	4 pieces
Lift Capacity:	300 kg with 4 suction cups without extensions, 450 kg with 6 suction cups with two extensions, 600 kg with 8 suction cups with four extensions
Total Rig Weight including trolley:	approx. 92 kg
Rig Size:	705mm (Height) x 808mm (Width) x 200mm (Depth)
Tilt:	90° manual, with lowering cylinder
Rotate:	360° manual, lockable every 45°
Power supply:	12V battery mains-independent with integrated charger
Features:	 The voltage indicator shows the battery charge level The vacuum display shows the current vacuum level Acoustic warning signal








[©] 07 3343 3377

DRAWINGS

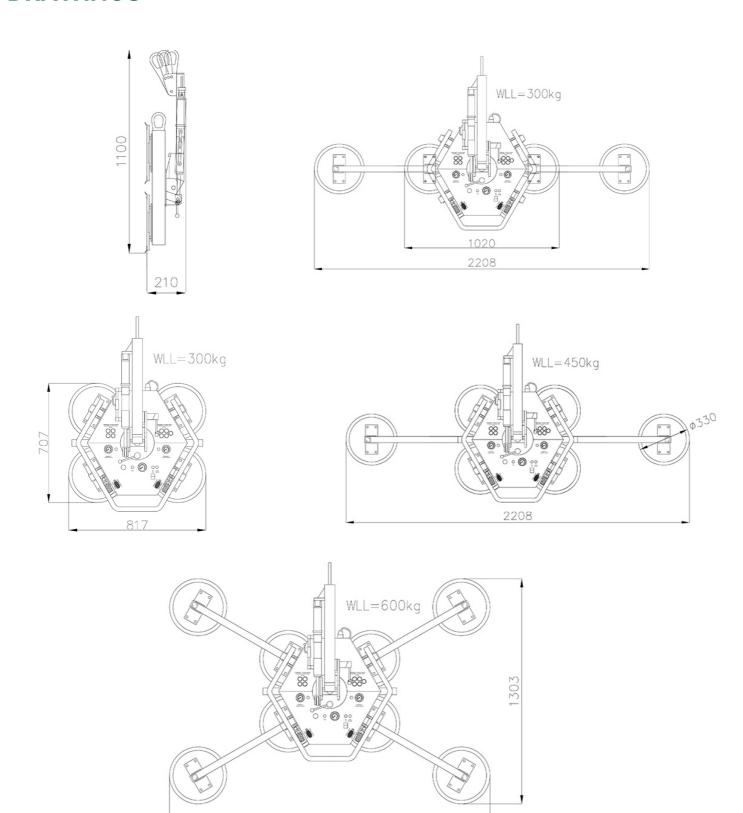

NFK Glazing & Industrial Supplies

- 28 Devlan Street, Mansfield, QLD 4122
- **0**7 3343 3377

1845

- sales@nfk.com.au
- 42 Tacoma Circuit, Canning Vale, WA 6155
- 08 9455 3866
- wasales@nfk.com.au